



# SCAN ENDEAVOR: NORSEMAN I SERIES

1500HP - SCR, 7500PSI, Walking Capable



## HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: Gardner Denver 1100

Rotary Table: 27.5"  
 Traveling Block: 500 Ton  
 Top Drive: TDS-11 SA  
 Iron Roughneck: Forum FH-80  
 Hydraulic Catwalk: N/A  
 Static Hook Load: 800,000#

## MAST & SUBSTRUCTURE

Mast Design: Veristic Mfg.- Box Rocket  
 Mast Height: 144'  
 Racking Capacity: 22,000' of 5" DP  
 Floor Height: 23' / Rotary Beam Clearance: 20'-8"

## TRANSPORT

Estimated Loads: 45  
 without drill pipe

## POWER PACKAGE


Engines: Four (4) Caterpillar 3512C Diesel Engines  
 Dual Gas: Caterpillar DGB Dual Fuel Gas Bleeding System  
 Generators: Four (4) Three 1365 Kw Kato Generators  
 SCR System : RHS Model 1400

## BOP EQUIPMENT

Annular: 13-5/8" 5K  
 Single Ram: 13-5/8" 10K  
 Double Ram: 13-5/8" 10K  
 Accumulator: USA Oil Tools 2000  
 Choke Manifold: 10K  
 Mud/Gas Separator: Shop Built

## MUD SYSTEM

Mud Pumps: Three (3) F1600 with 7500psi Fluid Ends  
 Liquid Mud Tanks: Two (2) with 1000 bbl Total Capacity.  
 Trip Tank: 64 bbl Total Capacity.  
 Shale Shakers: One (1) Dual Derrick FLC 503

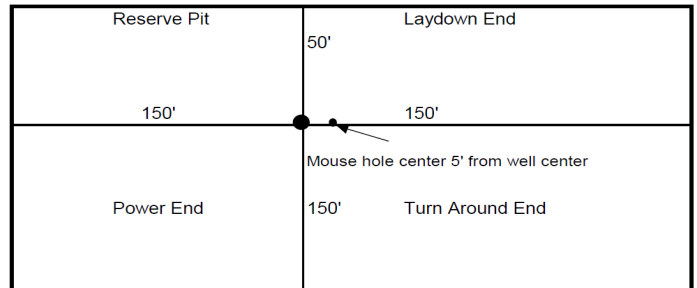

## TUBULARS

Drill Pipe: 5" Drill Pipe as needed.  
 Drill Collars: As needed per Customer's Well Program

## PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Veristic Mfg. (Stomper Type)  
 Pad Walking Distance: 0'-60'