



# SCAN SCOUT: NORSEMAN I SERIES

1000HP - SCR, 5000PSI, Walking Capable

## HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI  
 Rotary Table: 27.5"  
 Traveling Block: 500 Ton  
 Top Drive: TDS 11  
 Iron Roughneck: ST-80  
 Hydraulic Catwalk: Spindeltop  
 Static Hook Load: 1,000,000#

## MAST & SUBSTRUCTURE

Mast Design: Spindeltop  
 Mast Height: 142'  
 Racking Capacity: 21,000' of 5" Drill Pipe  
 Floor Height: 22' / Rotary Beam Clearance: 18'-8"

18'-8"

## TRANSPORT


Estimated Loads: 45 loads (without drill pipe)

## POWER PACKAGE

Engines: Three (3) Caterpillar 3512C Diesel Engines  
 Generators: Three (3) 1365 Kw Kato Generators  
 SCR System: Gulf Coast

## MUD SYSTEM

Mud Pumps: Two (2) F1600 with 5000 psi Fluid Ends  
 Liquid Mud Tanks: Two (2) with 880 bbl Total Capacity  
 Trip Tank: 80 bbl  
 Shale Shakers: Three (3) Swaco Mongoose

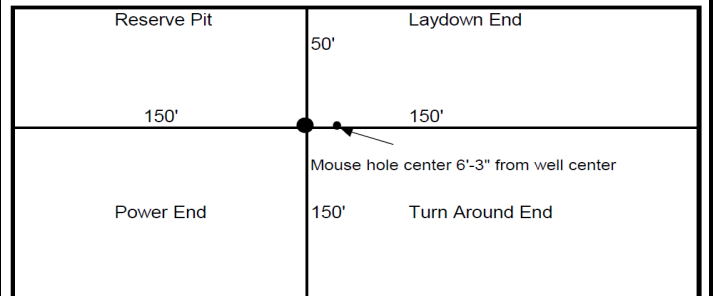

## BOP EQUIPMENT

Annular: 11" 5K  
 Double Ram: 11" 5K  
 Accumulator: 4 Station  
 Choke Manifold: 5K  
 Mud/Gas Separator: Shop Built

## TUBULARS

Drill Pipe: 5" Drill Pipe as Needed  
 Drill Collars: As needed per Customer's Well Program

## PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Spindeltop (Stomper Type)  
 Pad Walking Distance 0' to 100'