




SCAN EAGLE: NORSEMAN II SERIES

1500HP - AC, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: GES-AC

Rotary Table: 27.5"
 Traveling Block: 500 Ton
 Top Drive: GDM500 800HP
 Iron Roughneck: ST-80
 Hydraulic Catwalk: Canrig
 Static Hook Load: 700,000#

MAST & SUBSTRUCTURE

Mast Design: OWI
 Mast Height: 142'
 Racking Capacity: 18,000' of 5" Drill Pipe Floor
 Height: 29' / Rotary Beam Clearance: 27'

TRANSPORT

Estimated Loads: 50 loads (without drill pipe)

POWER PACKAGE

Engines: Generators: Four (4) 1365 Kw Kato
 Generators AC System: IEC

BOP EQUIPMENT


Annular: 13-5/8" 5K
 Single Ram: 13-5/8" 10K
 Double Ram: 13-5/8" 10K
 Accumulator: 6 Station
 Choke Manifold: 10K
 Mud/Gas Separator: Shop Built



MUD SYSTEM

Mud Pumps: Two (2) F1600 with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1000 bbl Total Capacity
 Trip Tank: 100 bbl
 Shale Shakers: Three (3) Swaco Mongoose

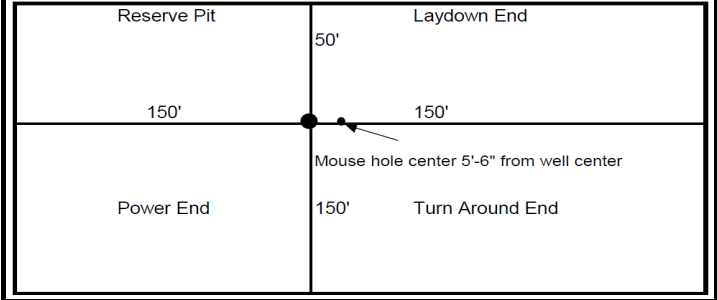

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: OWI (Stomper Type)

Pad Walking Distance 0' to 100'