



SCAN GOLD: NORSEMAN I SERIES

1500HP - SCR, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: Oilwell Model 840 E

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: Canrig 500 Ton AC

Iron Roughneck: Forum FH-80

Hydraulic Catwalk: NOV

Static Hook Load: 750,000#

MAST & SUBSTRUCTURE

Mast Design: National

Mast Height: 142'

Racking Capacity: 20,000' of 5" DP

Floor Height: 27' / Rotary Beam Clearance: 22'-8"

TRANSPORT

Estimated Loads: 50
without drill pipe

POWER PACKAGE

Engines: Three (3) Caterpillar 3512C Diesel Engines

Dual Gas: APG Dual Fuel Gas Blending System

Generators: Three(3) 1365 Kw Kato

SCR System: HHC Model 1601

MUD SYSTEM


Mud Pumps: Two(2) F1600 Equipped with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1100 bbl Total Capacity Trip

Tank: 80 bbl Total Capacity

Shale Shakers: One (1) Dual Derrick Hyperpool

One (1) Single Hyperpool

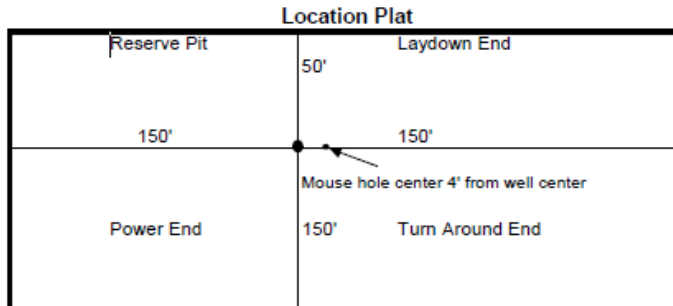

BOP EQUIPMENT

Annular: 13-5/8"-5K

Single Ram: 13-5/8"- 10K

Double Ram: 13-5/8"- 10K

Accumulator: Koomey Type 80

Choke Manifold: 10K

Mud/Gas Separator: Shop Built

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Veristic Mfg (Stomper Type)

Pad Walking Distance : 0'-100'