

SCAN TEXAS: NORSEMAN I SERIES

1500HP - SCR, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: Oilwell Model 840E

Rotary Table: 27.5"
Traveling Block: 500 Ton
Top Drive: Canrig 1250AC 500T
Iron Roughneck: Forum FH-80

Hydraulic Catwalk: NOV Pipecat Hydraulic Automatic

Static Hook Load: 1,000,000#

MAST & SUBSTRUCTURE

Mast Design: Pyramid Derrick & Equipment Corp.

Mast Height: 142'

Racking Capacity: 24,000' of 5" Drill Pipe

Floor Height: 25'-6" / Rotary Beam Clearance: 20'

TRANSPORT

Estimated Loads: 55 without drill pipe

POWER PACKAGE

Engines: (4) Caterpillar 3512c diesel engines

Dual Gas: APG Dual Fuel Gas Blending System

Generators: (4) 1365 Kw Kato

SCR System: NOV Ross Hill Four Bay

BOP EQUIPMENT

Annular: 13-5/8" 5K
Single Ram: 13-5/8" 10K
Double Ram: 13-5/8" 10K
Accumulator: Koomey Type 80

Choke Manifold: 10K Mud/Gas Separator: Shop Built

MUD SYSTEM


Mud Pumps: Three(3) F1600 with 7500 psi Fluid Ends Liquid

Mud Tanks: Two (2) with 1100 bbl Total Capacity Trip Tank:

80 bbl Total Capacity

Shale Shakers: (1) Single Derrick Hyperpool

(1) Dual Derrick Hyperpool

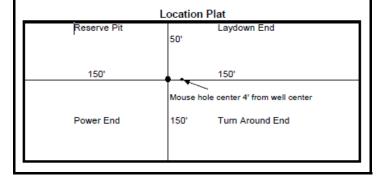

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Veristic Rig Walker Multi-Directional

Pad Walking Distance: 0'-100'