




# SCAN DENALI: NORSEMAN II SERIES

2000HP - AC, 7500PSI, Walking Capable

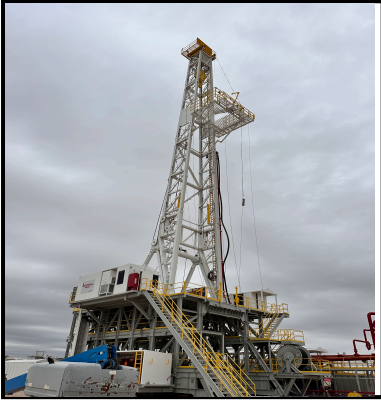

**HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT**

**Drawworks:** OWI 2000 AC

**Rotary Table:** 27.5"

**Traveling Block:** 500 Ton

**Top Drive:** GDS TDS11 Hi-Tork AC 500 Ton

**Iron Roughneck:** Forum FR-120

**Hydraulic Catwalk:** Hydraulic

**Static Hook Load:** 1,000,000#

**MAST & SUBSTRUCTURE**

**Mast Design:** Spindletop

**Mast Height:** 142'

**Racking Capacity:** 29,500' of 5 1/2" Drill Pipe

**Floor Height:** 26' 6" / Rotary Beam Clearance: 23' 4"

**TRANSPORT**

**Estimated Loads:** 55 loads (without drill pipe)

**POWER PACKAGE**

**Engines:** Four (4) Caterpillar 3512C Diesel Engines

**Generators:** Four (4) 1365 Kw Kato Generators

**AC System:** Current Power, equipped with CAT DGB

**Gas System**

**BOP EQUIPMENT**

**Annular:** 13-5/8" 5K


**Double Ram:** 13-5/8" 10K

**Accumulator:** 6 Station

**Choke Manifold:** 10K

**Mud/Gas Separator:** Shop Builf

**Single Ram:** 13-5/8" 10K

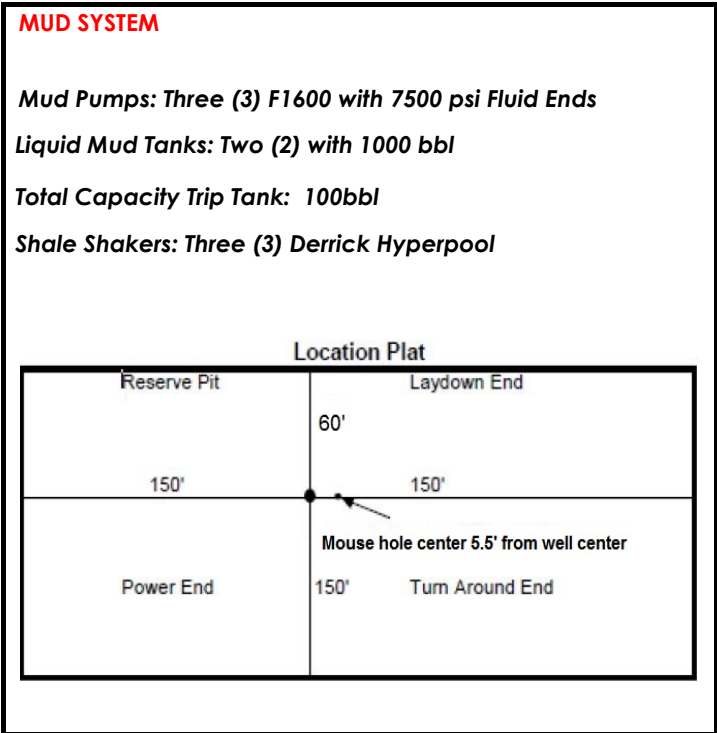

**TUBULARS**

**Drill Pipe:** 5" Drill Pipe as Needed

**Drill Collars:** As needed per Customer's Well Program

**PAD DRILLING (MULTI DIRECTIONAL)**

**Walking System/Type:** Spindletop (Stomper Type)

**Pad Walking Distance:** 0' to 100'