



SCAN PRIDE: NORSEMAN II SERIES

2000HP - AC, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI 2000HP, AC Driven

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: GDS TDS-11SA Hi-Tork AC, 500 Ton

Iron Roughneck: Premium TR-110

Hydraulic Catwalk: CANRIG PC 3000

Static Hook Load: 1,000,000#

MAST & SUBSTRUCTURE

Mast Design: Brewster

Mast Height: 142'

Racking Capacity: 28,000' of 5" DP

Floor Height: 25'-8" / Rotary Beam Clearance: 21'

TRANSPORT

Estimated Loads: 53
without drill pipe

POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel

Engines Dual Gas: APG Dual Fuel Gas Blending

System Generators: 1365 Kw Kato

AC System : Current Power

MUD SYSTEM


Mud Pumps: Three (3) F1600 with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1100 bbl Total Capacity

Trip Tank: 80 bbl Total Capacity

Shale Shakers: One (1) Dual Derrick Hyperpool

One (1) Single Derrick Hyperpool

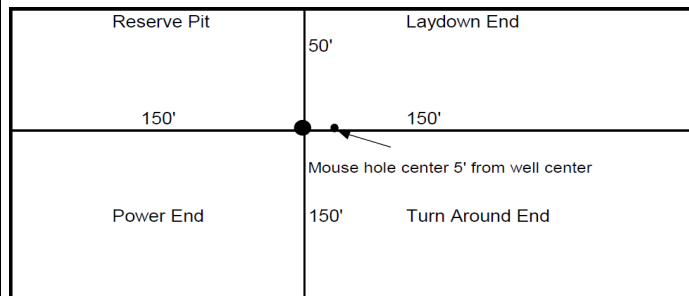

BOP EQUIPMENT

Annular: 13-5/8" 5K

Single Ram: 13-5/8" 10K

Double Ram: 13-5/8" 10K

Accumulator: Koomey T-8011s

Choke Manifold: 10K

Mud/Gas Separator: Shop Built

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: OWI Stealth Walker (Stomper Type)

Pad Walking Distance: 0'-100'