



SCAN RELIANT: NORSEMAN II SERIES

2000 HP - AC, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks:	OWI 2000 AC
Rotary Table:	27.5"
Traveling Block:	500 Ton
Top Drive:	GDS TDS11 Hi-Tork AC 500 Ton
Iron Roughneck:	Forum FR-120
Hydraulic Catwalk:	Forum
Static Hook Load:	1,000,000#

MAST & SUBSTRUCTURE

Mast Design: Spindletop
Mast Height: 142'
Racking Capacity: 29,500' of 5 1/2" Drill Pipe Floor
Height: 26' 6" / Rotary Beam Clearance: 23' 4"

TRANSPORT

Estimated Loads: 56 loads (without drill pipe)

POWER PACKAGE


Engines: Four (4) Caterpillar 3512C Diesel Engines,
Equipped with: APG Dual Fuel Gas Blending System
Generators: Four (4) 1365 Kw Kato Generators AC
System: Current Power

BOP EQUIPMENT

Annular: 13-5/8" 5K
Singular Ram: 13-5/8" 10K
Double Ram: 13-5/8" 10K
Accumulator: 6 Station
Choke Manifold: 10K
Mud/Gas Separator: Shop Built

MUD SYSTEM

Mud Pumps: Three (3) K-2200 with 7500 psi Fluid Ends
Liquid Mud Tanks: Two (2) with 1000 bbl Total Capacity
Trip Tank: 95 bbl
Shale Shakers: Three (3) Derrick Hyperpool

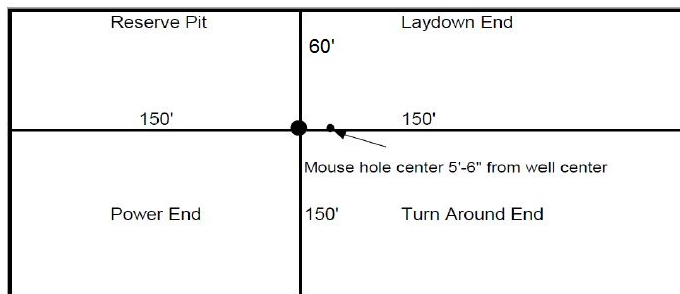

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed
Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Spindletop (Stomper Type)
Pad Walking Distance 0' to 100'