



## SCAN VISION: NORSEMAN II SERIES

1500HP - AC, 7500PSI, Walking Capable



### HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI 1600 AC

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: TDS-11SA Hi Torq

Iron Roughneck: Forum FR120

Hydraulic Catwalk: NOV Hydraulic

Static Hook Load: 1,000,000#

### MAST & SUBSTRUCTURE

Mast Design: Veristic Mfg- Box Rocket

Mast Height: 144'

Racking Capacity: 27,500' of 5" Drill Pipe

Floor Height: 23'-7" / Rotary Beam Clearance: 20'-8"

### TRANSPORT

Estimated Loads: 50  
without drill pipe

### POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines

Dual Gas: CAT DGB Dual Fuel Gas Blending System

Generators: Four (4) 1365Kw Kato

AC System: Current Power

### MUD SYSTEM

Mud Pumps: Three (3) F1600 with 7500 psi Fluid Ends


Liquid Mud Tanks: Two(2) with 1000 bbl Total Capacity

Trip Tank: 80 bbl Total Capacity

Shale Shakers: One (1) Dual Hyperpool

One (1) Single Hyperpool

Location Plat

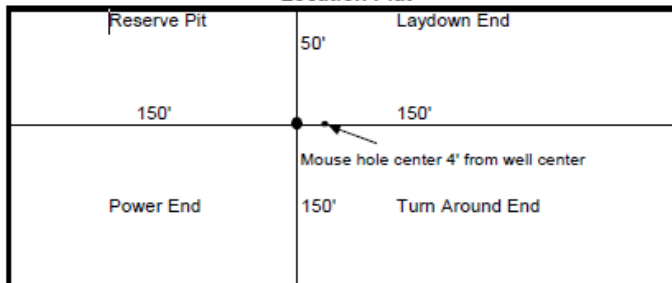

### BOP EQUIPMENT

Annular: 13-5/8" 5K

Single Ram: 13-5/8" 10K

Double Ram: 13-5/8" 10K

Accumulator: USA Oil Tools 2000

Choke Manifold: 10K

Mud/Gas Separator: Shop Built

### TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

### PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Veristic Mfg (Rig Walker)

Pad Walking Distance: 0'-100'