




## SCAN TITAN: NORSEMAN II SERIES

2000HP - AC, 7500PSI, Walking Capable

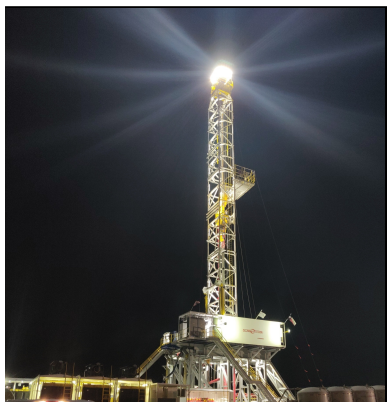

### HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI 2000

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: Canrig 500 Ton 1250AC

Iron Roughneck: Forum FH-80

Hydraulic Catwalk: Hydraulic

Static Hook Load: 1,000,000#

### MAST & SUBSTRUCTURE

Mast Design: Drilling Structures International

Mast Height: 147'

Racking Capacity: 23,000' of 5" DP

Floor Height: 30' / Rotary Beam Clearance: 25'

### TRANSPORT

Estimated Loads: 55  
without drill pipe

### POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines

Dual Gas CAT DGB Dual Fuel Gas Blending System

Generators: Four (4) 1365 Kw Kato

AC System: Current Power

### MUD SYSTEM


Mud Pumps: Three (3) F1600 with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1100 bbl Total Capacity

Trip Tank: 80 bbl Total Capacity

Shale Shakers: One (1) Dual Derrick Hyperpool

One (1) Single Derrick Hyperpool

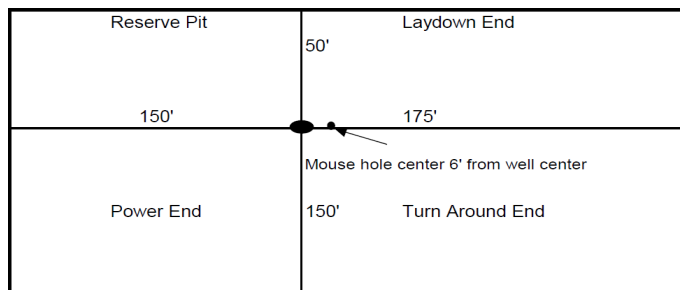

### BOP EQUIPMENT

Annular: 13-5/8" 5K  
Single Ram: 13-5/8" 10K  
Double Ram: 13-5/8" 10K  
Accumulator: Koomey  
Choke Manifold: 10K  
Mud/Gas Separator: Shop Built

### TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

### PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: OWI Stealthwalker (Stomper Type)

Pad Walking Distance 0'-100'