



SCAN QUEST: NORSEMAN II SERIES

2000HP - AC, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI 2000

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: GDS TDS-11 Hi-torq

Iron Roughneck: Forum FH-100

Hydraulic Catwalk: Forum Hydraulic

Static Hook Load: 1,000,000#

MAST & SUBSTRUCTURE

Mast Design: Brewster

Mast Height: 142'

Racking Capacity: 27,000' of 5" Drill Pipe

Setback Capacity: 750,000 lbs.

Floor Height: 30' / Rotary Beam Clearance: 25'-6"

TRANSPORT

Estimated Loads: 60
without drill pipe

POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines

Dual Gas: CAT DGB Dual Fuel Gas Blending

System Generators: Four (4) 1365 Kw Kato

Line Power Capable

AC System : Current Power System

BOP EQUIPMENT

Annular: 13-5/8" 5K

Single Ram: 13-5/8" 10K

Double Ram: 13-5/8" 10K

Accumulator: Koomey T20120

Choke Manifold: 10K

Mud/Gas Separator: Shop Built

MUD SYSTEM

Mud Pumps: Three (3) F1600 with 7500 psi Fluid Ends


Liquid Mud Tanks: Two(2) w/ 1100 bbl Total Capacity

Trip Tank: 100 bbl Total Capacity

Shale Shakers: Triple Derrick Hyperpool

Premix: 500 bbl Tank

Location Plat

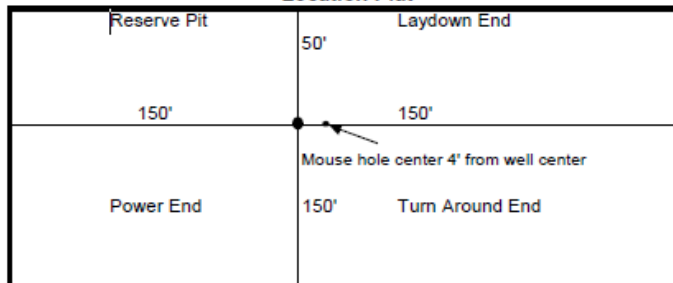

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: OWI Stealth Walker (Stomper Type)

Pad Walking Distance: 0'-200'