



SCAN EXPLORER: NORSEMAN II SERIES

2000HP - AC, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks:	OWI 2000 AC
Rotary Table:	27.5"
Traveling Block:	500 Ton
Top Drive:	500 Ton GDSTD11 Hi-Tork AC
Iron Roughneck:	Forum
Hydraulic Catwalk:	Canrig
Static Hook Load:	1,000,000#

MAST & SUBSTRUCTURE

Mast Design: Spindletop

Mast Height: 142'

Racking Capacity: 29,500' of 5" Drill Pipe

Floor Height: 26' 6" / Rotary Beam Clearance: 23' 4"

TRANSPORT

Estimated Loads: 55 loads (without drill pipe)

POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines


Dual Gas: APG Dual Fuel Gas Blending System

Generators: Four (4) 1365 Kw Kato Generators AC

System: Current Power

BOP EQUIPMENT

Annular:	13-5/8" 5K
Double Ram:	13-5/8" 10K
Accumulator:	6 Station
Choke Manifold:	10K
Mud/Gas Separator:	Shop Built

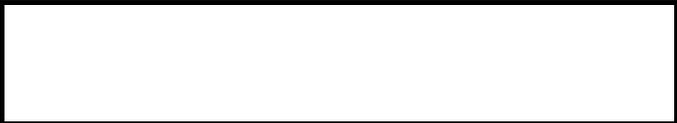

MUD SYSTEM

Mud Pumps: Three (3) F2200 with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1100 bbl Total Capacity

Trip Tank: 100 bbl

Shale Shakers: Three (3) Derrick Hyperpool GT Single

Location Plat

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Spindletop (Stomper Type)

Pad Walking Distance: 0' to 100'