




SCAN LEGACY: NORSEMAN II SERIES

2000HP - AC, 7500PSI, Walking Capable

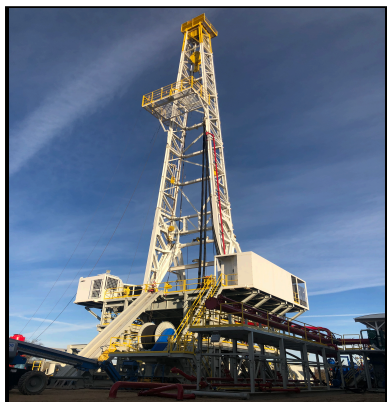

HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI 2000

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: GDS TDS11HI-TORK AC – 500 ton

Iron Roughneck: Forum FH-80

Hydraulic Catwalk: Hydraulic

Static Hook Load: 1,000,000 #

MAST & SUBSTRUCTURE

Mast Design: JJ450/45-k

Mast Height: 147'

Racking Capacity: 32,000' of 5" DP

Floor Height: 25'

Rotary Beam Clearance: 20'-3"

TRANSPORT

Estimated Loads: 50 without drill pipe

POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines

Dual Gas: CAT DGB Dual Fuel Gas Blending System

Generators: Four (4) 1365 Kw Kato

AC System: Current Power


MUD SYSTEM

Mud Pumps: Three (3) K2200 with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1200 bbl Total Capacity

Trip Tank: 80 bbl Total Capacity

Shale Shakers: Three (3) Derrick Hyperpool

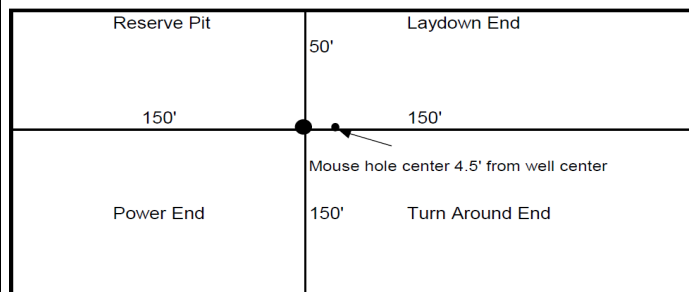

BOP EQUIPMENT

Annular: 13-5/8" 5K

Single Ram: 13-5/8" 10K

Double Ram: 13-5/8" 10K

Accumulator: USA Pressure Controls

Choke Manifold: 10K

Mud/Gas Separator: Shop Built

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: OWI Stealthwalker (Stomper Type)

Pad Walking Distance : 0'-100'