



SCAN PRAIRIE: NORSEMAN I SERIES

1200HP - SCR, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: Ideco E1200

Rotary Table: 20.5"
 Traveling Block: 350 Ton
 Top Drive: Canrig 350 AC
 Iron Roughneck: ST-80
 Hydraulic Catwalk: Canrig
 Static Hook Load: 800,000#

MAST & SUBSTRUCTURE

Mast Design: OWI

Mast Height: 140'

Racking Capacity: 21,000' of 5" Drill Pipe

Floor Height: 26' / Rotary Beam Clearance: 24.5'

TRANSPORT

Estimated Loads: 60 loads (without drill pipe)

POWER PACKAGE

Engines: Three (3) Caterpillar 3512C Diesel Engines

Generators: Three (3) 1365 Kw Kato Generators

SCR System: IEC


MUD SYSTEM

Mud Pumps: Two (2) F1600 with 7500 psi Fluid Ends

Liquid Mud Tanks: Two (2) with 900 bbl Total Capacity

Trip Tank: 80 bbl Total Capacity

Shale Shakers: Three (3) Derrick B4X-12

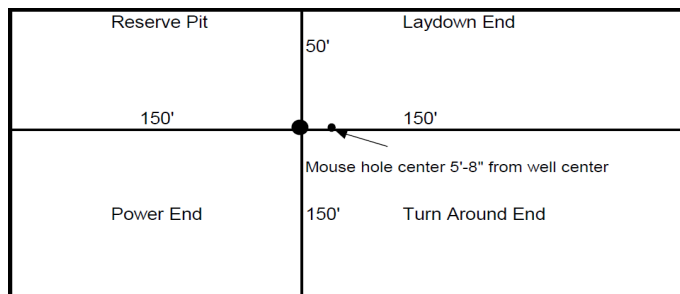

BOP EQUIPMENT

Annular: 13-5/8" 5K

Double Ram: 13-5/8" 5K

Accumulator: 8 Station

Choke Manifold: 5K

Mud/Gas Separator: Shop Built

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: OWI (Stomper Type)

Pad Walking Distance 0' to 100'