



SCAN VICTORY: NORSEMAN I SERIES

1500HP - SCR, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: Oilwell 840E

Rotary Table: 27.5"

Traveling Block: 500 Ton

Top Drive: TDS-11 SA

Iron Roughneck: Forum FH-80

Hydraulic Catwalk: N/A

Static Hook Load: 771,000#

MAST & SUBSTRUCTURE

Mast Design: Pyramid Derrick & MFG. Corp

Mast Height: 142'

Racking Capacity: 21,000' of 5" DP

Floor Height: 27' / Rotary Beam Clearance: 23'

TRANSPORT

Estimated Loads: 48
without drill pipe

POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines

Dual Gas: Caterpillar DGB Dual Fuel Gas Bleeding System

Generators: Four (4) Three 1365 Kw Kato Generators

SCR System : RHS Model 1400

MUD SYSTEM


Mud Pumps: Three (3) F1600 with 7500psi Fluid Ends

Liquid Mud Tanks: Two (2) with 1000 bbl Total Capacity.

Trip Tank: 64 bbl Total Capacity.

Shale Shakers: One (1) Dual Derrick Hyperpool

One (1) Single Derrick 504

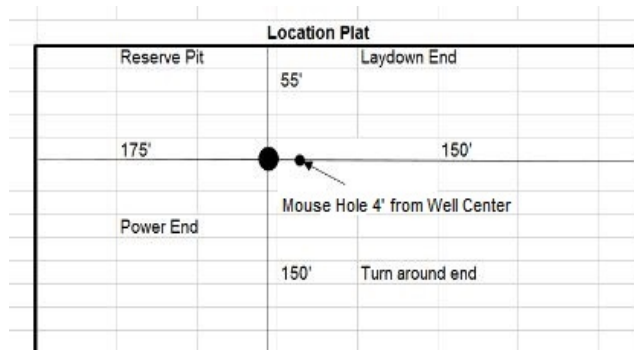

BOP EQUIPMENT

Annular: 13-5/8" 5K

Single Ram: 13-5/8" 10K

Double Ram: 13-5/8" 10K

Accumulator: USA Oil Tools 2000

Choke Manifold: 10K

Mud/Gas Separator: Shop Built

TUBULARS

Drill Pipe: 5" Drill Pipe as needed.

Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Veristic Mfg. (Stomper Type)

Pad Walking Distance: 0'-100'