



SCAN VISION: NORSEMAN II SERIES

1500HP - AC, 7500PSI, Walking Capable



HOISTING, ROTATING & PIPE-HANDLING EQUIPMENT

Drawworks: OWI 1600 AC

Rotary Table: 27.5"
 Traveling Block: 500 Ton
 Top Drive: TDS-11SA Hi Torq
 Iron Roughneck: Forum FR120
 Hydraulic Catwalk: NOV Hydraulic
 Static Hook Load: 1,000,000#

MAST & SUBSTRUCTURE

Mast Design: Veristic Mfg - Box Rocket
 Mast Height: 144'
 Racking Capacity: 27,500' of 5" Drill Pipe
 Floor Height: 29'-7" / Rotary Beam Clearance: 26'-8"

TRANSPORT

Estimated Loads: 50
 without drill pipe

POWER PACKAGE

Engines: Four (4) Caterpillar 3512C Diesel Engines
 Generators: Four (4) 1365Kw Kato
 AC System: Current Power


BOP EQUIPMENT

Annular: 13-5/8" 5K
 Single Ram: 13-5/8" 10K
 Double Ram: 13-5/8" 10K
 Accumulator: USA Oil Tools 2000
 Choke Manifold: 10K
 Mud/Gas Separator: Shop Built

MUD SYSTEM

Mud Pumps: Three (3) F1600 with 7500 psi Fluid Ends
 Liquid Mud Tanks: Two(2) with 1000 bbl Total Capacity
 Trip Tank: 80 bbl Total Capacity
 Shale Shakers: One (1) Dual Hyperpool
 One (1) Single Hyperpool

Location Plat

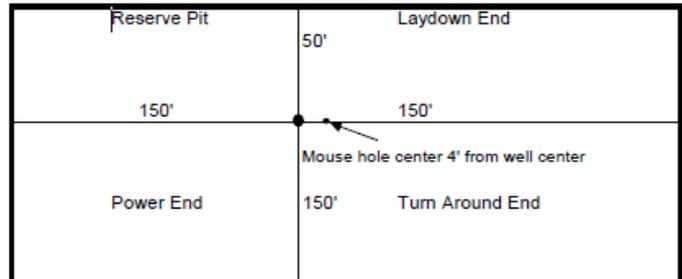

TUBULARS

Drill Pipe: 5" Drill Pipe as Needed
 Drill Collars: As needed per Customer's Well Program

PAD DRILLING (MULTI DIRECTIONAL)

Walking System/Type: Veristic Mfg (Rig Walker)
 Pad Walking Distance: 0'-100'